







TC5015A









载荷特性 Load Capacity

工作幅度 m Working radius	16	20	23	26	29	32	35	38	41	44	47	50
3t-29.3m  t	3	3	3	3	3	2.69	2.41	2.18	1.98	1.81	1.66	1.53
6t-16.0m  t	6	4.64	3.95	3.42	3	2.66	2.38	2.15	1.95	1.78	1.63	1.5

工作幅度 m Working radius	16	20	23	26	29	32	35	38	41	44			
3t-29.3m  t	3	3	3	3	3	3	3	3	2.69	2.41	2.18	1.98	1.81
6t-16.0m  t	6	4.64	3.95	3.42	3	2.66	2.38	2.15	1.95	1.78			


工作幅度 m Working radius	16	20	23	26	29	32	35	38			
3t-29.3m  t	3	3	3	3	3	3	3	3	2.69	2.41	2.18
6t-16.0m  t	6	4.64	3.95	3.42	3	2.66	2.38	2.15			

机构特性 Mechanism specification


				kW	
起升 Hoisting 	m/min	8.88	40 80	4.44 20 40	24/24/5.4
	t	3	3 1.5	6 6 3	300m
变幅 Trolleying 	m/min		42/21		3.3/2.2
回转 Slewing 	r/min		0~0.6		5.5
行走 Travelling 	m/min		0~25		2x5.5
顶升 Climbing 	m/min		0.7		7.5
供电容量 Necessary electric power					43.8
电源 Main supply					~380V/50Hz

TC5015A


ZOOMLION

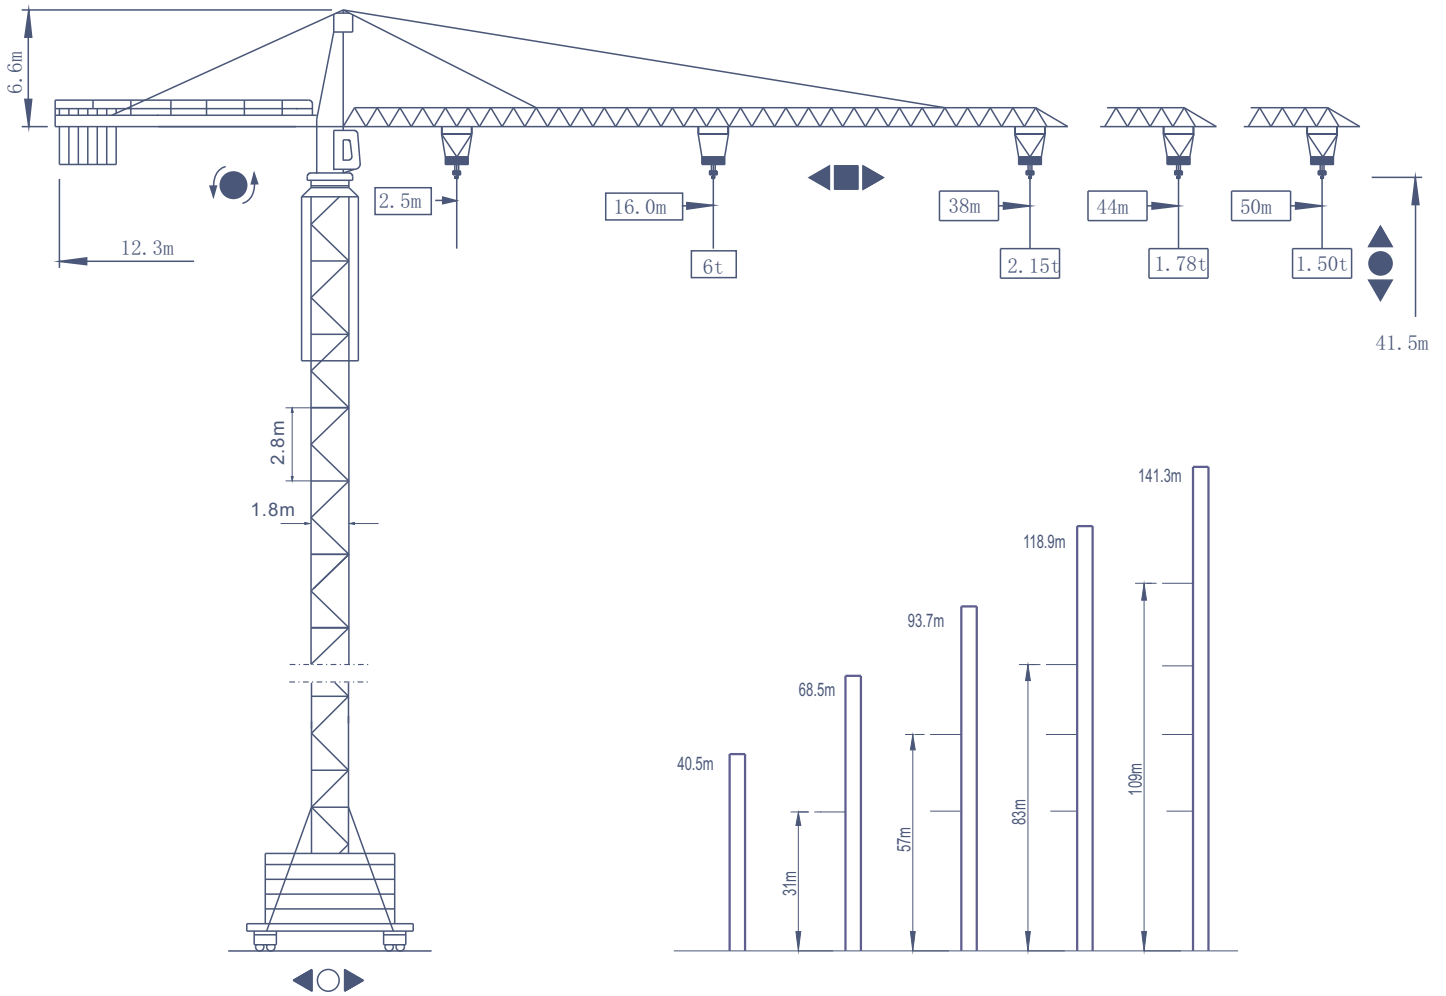


行走式
Mobile



底座固定式
Chassis stationary



支腿固定式
Outrigger stationary



F1	◇ 46t	△ 60t
	40t	

F2	◇ 80t	△ 90t	
F3	◇ 54t	△ 70t	31.5t

F 反力 Reaction	◇ 工作状态 in service	自重 without load and ballast with the longest jib and maximum height
	△ 非工作状态 out of service	