















# 载荷特性 Load Capacity

工作幅度 m Working radius	14	17	20	23	26	29	32	35	38	41	44	47	50	53	56
4t-24.9m  t	4	4	4	4	3.80	3.32	2.94	2.63	2.36	2.14	1.94	1.77	1.63	1.50	1.38
8t-13.7m  t	7.79	6.18	5.12	4.31	3.72	3.24	2.86	2.55	2.28	2.06	1.86	1.69	1.55	1.42	1.30

工作幅度 m Working radius	14	17	20	23	26	29	32	35	38	41	44	47	50
4t-27.6m  t	4	4	4	4	4	3.76	3.34	2.99	2.70	2.45	2.23	2.04	1.88
8t-15.1m  t	8	6.69	5.75	4.87	4.22	3.68	3.26	2.91	2.62	2.37	2.15	1.96	1.80


工作幅度 m Working radius m	14	17	20	23	26	29	32	35	38	41	44
4t-29.8m  t	4	4	4	4	4	4	3.69	3.31	2.99	2.72	2.48
8t-16.3m  t	8	7.63	6.32	5.37	4.64	4.07	3.61	3.23	2.91	2.64	2.40

## 机构特性 Mechanism specification


			kW			
起升 Hoisting 	m/min 0~50 t 4	0~100 2	0~25 8	0~50 4	37	300m
变幅 Trolleying 	m/min	0~55			4.0	
回转 Slewing 	r/min	0~0.8			2X4.0	
行走 Travelling 	m/min	0~25			2X5.5	
顶升 Climbing 	m/min	0.7			7.5	
供电容量 Necessary electric power					60	
电源 Main supply					~380V/50Hz	

# TC5613A


**ZOOMLION**

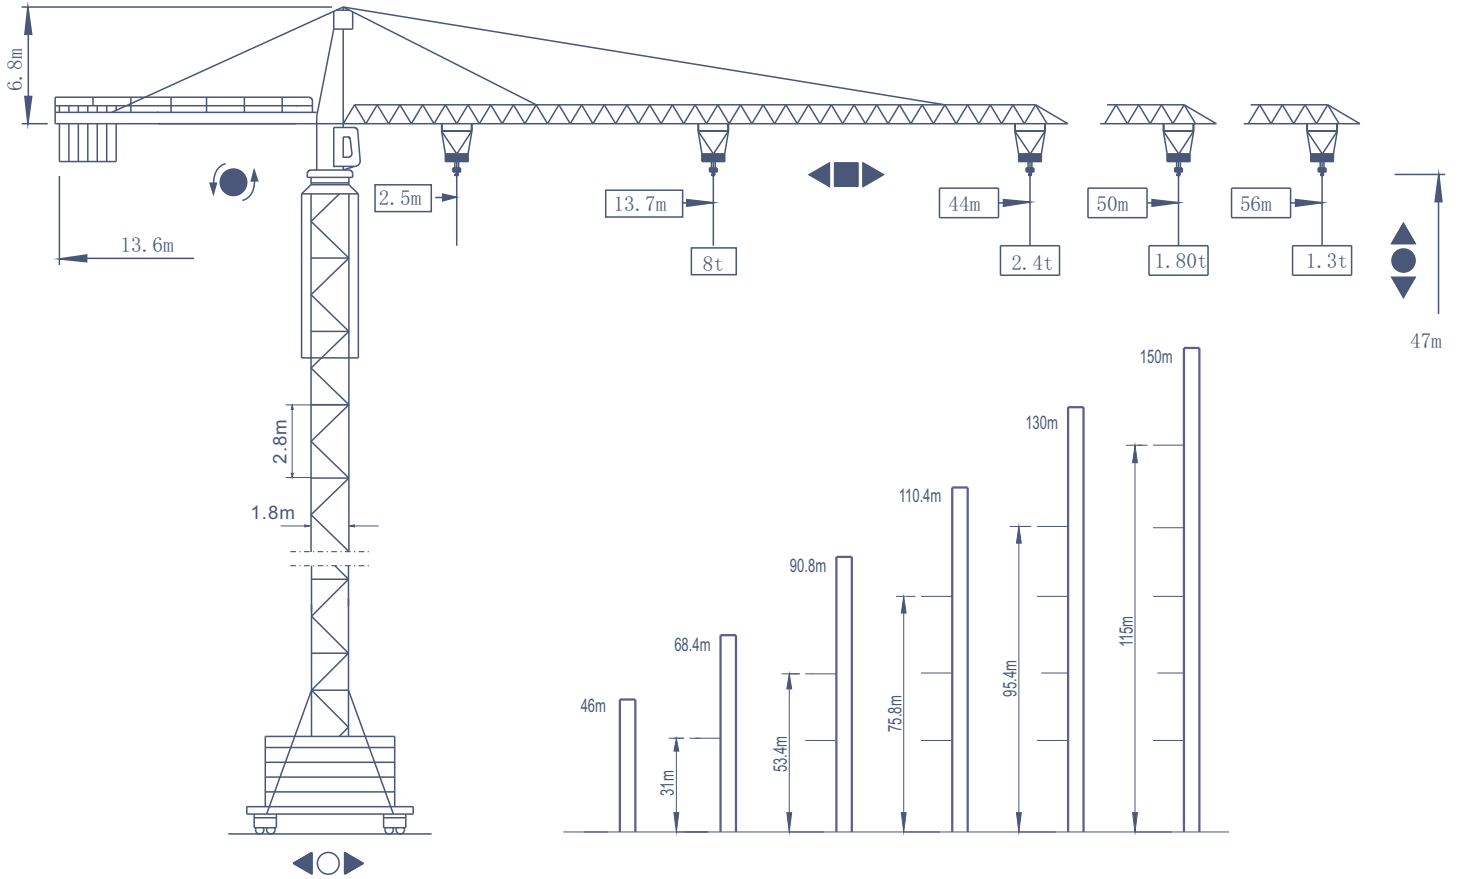


行走式  
Mobile



底座固定式  
Chassis stationary

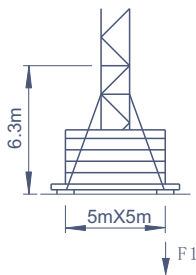

支腿固定式  
Outrigger stationary



F1	◇ 61t	△ 70t
	48t	

F2	◇ 105t	△ 125t	
F3	◇ 73t	△ 96t	41t

F 反力 Reaction	◇ 工作状态 in service	自重 without load and ballast with the longest jib and maximum height
	△ 非工作状态 out of service	